

Safety Steps and Procedures To Follow Prior To Applying D-5933NS:

Always refer to the safety data sheet (SDS) prior to applying **D-5933NS** if you have any questions about safety and regulatory information for this product.

Always wear gloves, protective clothing, and protective eyewear to prevent **D-5933NS** from making contact with the skin and eyes.

Make sure there is proper airflow in the area where **D-5933NS** will be applied and always wear the proper respiration devices if the ventilation in the areas where **D-5933NS** will be applied is insufficient.

Keep **D-5933NS** away from any combustible materials or other sources of heat, fire, and ignition.

D-5933NS Product Information and Benefits:

D-5933NS contains a multipurpose airframe grease called Aeroshell® 33, has a green color, and is made with a synthetic base oil and a lithium complex thickener, which provides enhanced corrosion resistance and load-carrying capacity.

D-5933NS, in combination with the snorkel, saves valuable time and labor and reduces the expense of wasting lubricant.


D-5933NS is useful in temperatures from **-100° F (-73°C) to +250° F (+121°C)** and applies a clean and uncontaminated layer of grease where it is needed.

When **D-5933NS** is being used, the non-toxic and non-flammable propellants vaporize so that the lubricant is the only liquid that is left behind.

Places Where D-5933NS Can Be Applied On and Tips For Applying It:

D-5933NS can be used on:

- *Tailing edge flaps (**Use as a replacement for molybdenum disulfide**)
- *General airframe (**Subject to moisture entrapment problems**)
- *Highly loaded gears (**Subject to moisture entrapment problems**)
- *Actuator screw mechanisms (**Subject to moisture entrapment problems**)
- *Instruments (**Subject to moisture entrapment problems**)
- *All sliding and wiping surfaces (**Subject to moisture entrapment problems**)

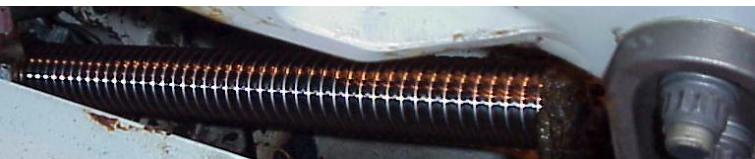

Do not use **D-5933NS** to replace lubrication achieved by grease gun application through zerk fittings.

Use **D-5933NS** where drawings or maintenance manuals allow the use of hand or brush application of bulk grease.



Part of




D-5933NS Application Procedures:

1.) **D-5933NS** can be applied with the following application methods:

- * Aerosol Cans
- * **Formit**® Extension Wands-For use with all **Zip-Chem**® aerosols to reach difficult to access areas, such as stringer edges.

- * **Formit**® 360° Spray (White Tube) Wand
- * **Formit**® Fan Spray Spray (Blue Tube) Wand
- * **Formit**® 180° Spray (Black Tube) Wands



Formit® 360° Spray Demonstration Video



Formit® Fan Spray Demonstration Video



Formit® 180° Spray Demonstration Video



D-5933NS Product Pictures and Zip-Chem® Product Packaging Part Numbers:

D-5933NS

*Case of 12 of 16 fl oz (473 mL) Aerosols-**008431**

Gloves	Protective Clothing	Protective Eyewear	Respiratory Devices
Ventilation Equipment			



← **D-5933NS** 16 fl oz (473 mL) Aerosol

Formit® Wands (12 Assemblies Per Package)

- ***Formit**®-18-Fan-006224
- ***Formit**®-18-180-006226
- ***Formit**®-18-360-006227
- ***Formit**®-18-STD-FOG-008352
- ***Formit**®-18-90-FOG-008353
- ***Formit**®-29-360-101321
- ***Formit**®-36-360-009131
- ***Formit**®-48-360 with metal sleeve-009132
- ***Formit**®-48-360 without metal sleeve-100424
- ***Formit**®-48-Fan-008460
- ***Formit**® Sample Pack (3 each of **Formit**®-18-Fan, **Formit**®-18-180, **Formit**®-18-360, **Formit**®-18-STD-FOG-100107

Formit® NSN's: 4730-01-612-9914, 4730-01-661-8773 (**Formit**®-18-Fan); 6850-01-492-2942 (**Formit**®-18-360); 4730-01-632-0156 (**Formit**®-18-STD-FOG); 1560-01-658-8943 (with metal sleeve), 4730-01-659-5461 (without metal sleeve) (**Formit**®-48-360); 4730-01-632-0157 (**Formit**®-48-Fan)

For application questions regarding **D-5933NS**, contact **Zip-Chem**® Aviation Products at (1) 408 782 2335 or zipchem@addevmaterials.com.