

Safety Steps and Procedures To Follow Prior To Applying Zip-Strip™ 125M:

- 1.) Always refer to the safety data sheet (SDS) prior to applying **Zip-Strip™ 125M** if you have any questions regarding the following information about this product.
- 2.) Always wear gloves and protective eyewear to prevent **Zip-Strip™ 125M** from making contact with the skin and eyes.
- 3.) When working with **Zip-Strip™ 125M**, in areas with poor ventilation, always wear a half-face respirator with organic vapor cartridge mask.
- 4.) Make sure that there are no sparks, open flames, hot surfaces, or other heat and fire ignition sources in the area where **Zip-Strip™ 125M** will be applied.



Methods For Applying Zip-Strip™ 125M:

Zip-Strip™ 125M can be applied via the following methods:

- * Aerosol
- * Airless Spray Equipment
- * Air Assisted Spray Equipment
- * Dipping
- * Brushing

Zip-Strip™ 125M Application Procedures:

- 1.) Apply **Zip-Strip™ 125M** at a thickness of approximately 2 to 7 mils (51-178 microns), depending on the thickness and age of the material to be removed.
- 2.) Allow **Zip-Strip™ 125M** to dwell for 5-10 minutes (10-20 minutes for heavy duty removal) and then remove by rinsing with water or using a pressure spray of water.
- 3.) Try to prevent **Zip-Strip™ 125M** from drying on the surface. If drying occurs, apply a light film of additional **Zip-Strip™ 125M** and rinse off or wipe clean with a wet cloth.

Brush Applying Zip-Strip™ 125M:

- 1.) Brush the areas that need to be cleaned. Apply **Zip-Strip™ 125M** at approximately 2 to 7 mils (51-178 microns).
- 2.) Let **Zip-Strip™ 125M** dwell for 5-10 minutes (10-20 minutes for heavy duty removal).
- 3.) Rinse **Zip-Strip™ 125M** off with water or wipe clean with a wet cloth.

Spray Applying Zip-Strip™ 125M:

1.) The following equipment can be used to apply **Zip-Strip™ 125M**.

- * Airless Spray Equipment
- * Air Assisted Spray Equipment
- * Aerosol
- * Pump Sprayer
- * **Formit®** Extension Wands-For use with all **Zip-Chem®** aerosols to reach difficult to access areas, such as stinger edges.

2.) Spray **Zip-Strip™ 125M** on the surface so that it forms a continuous film that is 2-7 mils (51-178 microns).


3.) Let **Zip-Strip™ 125M** dwell for 5-10 minutes (10-20 minutes for heavy duty removal).

4.) Rinse **Zip-Strip™ 125M** off with water or wipe clean with a wet cloth.

* **Formit®** 360° Spray (White Tube) Wand

* **Formit®** Fan Spray Spray (Blue Tube) Wand

* **Formit®** 180° Spray (Black Tube) Wands

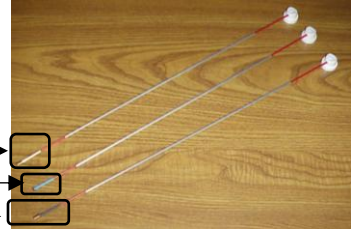

Formit® 360° Spray
Demonstration Video



Formit® Fan Spray
Demonstration Video



Formit® 180° Spray
Demonstration Video



Zip-Strip™ 125M Product Information and Benefits:

- 1.) **Zip-Strip™ 125M** is a water rinseable, fast acting neutral pH CIC/CPC remover that removes wet, waxy, and/or dry film corrosion inhibiting compounds (CIC's) and is very effective even after a short dwell time.
- 2.) **Zip-Strip™ 125M** is effective against a wide range of aviation soils, such as MoS₂ grease, hydraulic fluid, wax, and carbon deposits.

Areas Where Zip-Strip™ 125M Should Be Applied:

1.) **Zip-Strip™ 125M** can be applied on:

- * Large Surface Areas
- * Access Panels
- * Anywhere that needs to be cleaned that can be rinsed off or wiped clean with a water soaked rag.

Example of a large surface area (i.e. Wheel Well)



Part of



ADDEV
MATERIALS

Zip-Strip™ 125M Product Pictures and Zip-Chem® Product Packaging Part Numbers:

Zip-Strip™ 125M

- *Case of 12 of 16 fl oz (473 mL) Aerosols-**102614**
- *Case of 4 each Gallon (4 each of 3.8 Liter Cans-**102608**
- *5 Gallon (18.9 Liter) Pail-**102609**
- *55 Gallon (208 Liter) Pail-**102610**
- *Special Packaging Upon Request

Formit® Wands (12 Assemblies Per Package)

- *Formit®-18-Fan-**006224**
- *Formit®-18-180-**006226**
- *Formit®-18-360-**006227**
- *Formit®-18-STD-FOG-**008352**
- *Formit®-18-90-FOG-**008353**
- *Formit®-29-360-**101321**
- *Formit®-36-360-**009131**
- *Formit®-48-360 with metal sleeve-**009132**
- *Formit®-48-360 without metal sleeve-**100424**
- *Formit®-48-Fan-**008460**
- *Formit® Sample Pack (3 each of Formit®-18-Fan, Formit®-18-180, Formit®-18-360, Formit®-18-STD-FOG-**100107**)

Organic Vapor Cartridge Mask | Protective Eyewear

Gloves | Airless Spray Equipment | Pump Sprayer

Air Assisted Spray Equipment | Brushes



← 1 Gallon (3.8 Liter) Can



← 16 fl oz (473 mL) Aerosol
← NSN: 6850-01-707-8887

Additional Zip-Strip™ 125M NSN's: 6850-01-707-8887 (16 fl. oz (473 mL) Aerosol), 6850-01-695-8514 (5 Gallon (18.9 Liter) Pail)

Formit® NSN's: 4730-01-612-9914, NSN: 4730-01-661-8773 (**Formit®-18-Fan**); 6850-01-492-2942 (**Formit®-18-360**); 4730-01-632-0156 (**Formit®-18-STD-FOG**); 1560-01-658-8943 (with metal sleeve), 4730-01-659-5461 (without metal sleeve) (**Formit®-48-360**); 4730-01-632-0157 (**Formit®-48-Fan**)

For application questions regarding Zip-Strip™ 125M, contact Zip-Chem® Aviation Products at (1) 408 782 2335 or zipchem@addevmaterials.com.