

ZC-082



Page 1 of 5

Product description:


SELF HEALING CORROSION CONTROL LUBRICANT

FEATURES:

- ▶ A versatile rust preventive coating
- ▶ Provides a tough and transparent film that is water displacing for use under the most severe corrosion conditions
- ▶ Self healing

KEY BENEFITS:

- ▶ Prevents corrosion up to **2 years**
- ▶ Does not flake
- ▶ An extremely effective corrosion preventive for the lubrication and protection of aircraft cables
- ▶ Resists flow up to **175°F (79°C)**
- ▶ Parts that are coated with **ZC-082** can be stored outside
- ▶ Protects metal substrates from corrosion in severe salt spray environments
- ▶ Adheres firmly to metal surfaces

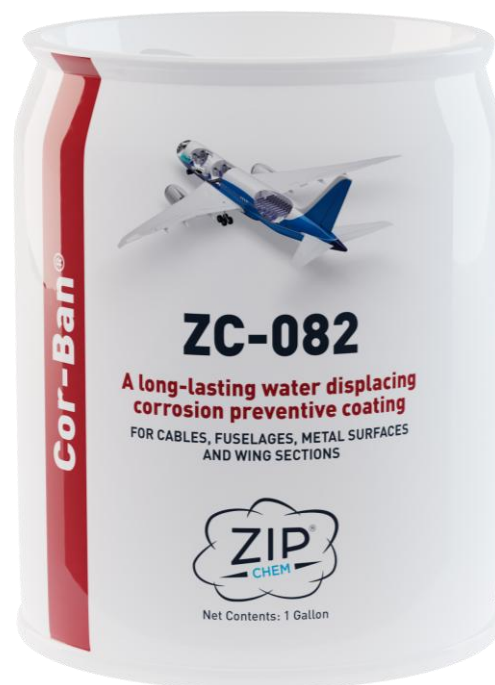

Rev: 29088F
10-28-2026



For more information contact us :
zipchem@addevmaterials.com



Part of



ADDEV
MATERIALS

ZC-082



Page 2 of 5

Product description:

SELF HEALING CORROSION CONTROL LUBRICANT

KEY BENEFITS (CONTINUED FROM PAGE 1):

- ▶ Dry to the touch within **two hours**
- ▶ **ZC-082** is a recommended product for aircraft
- ▶ Free of chromates
- ▶ Free from heavy metals
- ▶ Low toxicity

SPECS:

- UAL OIL 4501-11SC

APPLICATIONS:

- ✓ Apply in fuselages and wing sections (Preparing aircraft for HMV (Heavy Maintenance Visits) or storage)
- ✓ Aerosol application available as **D-5082NS**
- ✓ **ZC-082** can be removed using **Sur-Prep® 3160**, **D-5640NS**, **ZC-640**, **Sur-Prep® 3167**, or mineral spirits
- ✓ Please refer to the **ZC-082** application manual for detailed application instructions. This manual can be obtained by reaching out to your **Zip-Chem®** rep for a copy of this document.
- ✓ Store **ZC-082** at **40°F - 100°F (4.4°C - 37.8°C)** in the original unopened containers. Keep containers closed when not in use and protect **ZC-082** from direct sunlight.



For more information contact us :
zipchem@addevmaterials.com



Part of



ADDEV
MATERIALS

ZC-082



Page 3 of 5

Product description:

SELF HEALING CORROSION CONTROL LUBRICANT

PHYSICAL PROPERTIES:

- ▶ **Coverage:** >1000 sq ft/Gal (25 m²/Liter)
- ▶ **Density:** 7.1 lbs./Gal. (850 grams/liter)
- ▶ **Flash Point:** 112°F (44°C)
- ▶ **Pour Point:** 10°F (-12°C)
- ▶ **Salt Spray (ASTM B-117):** >1000 hours on Aluminum (Al)
- ▶ **Shelf Life:** 3 Years From Date Of Shipment If Properly Stored
- ▶ **Typical Film Thickness:** 0.9-1.0 mils (23-25 microns)
- ▶ **Viscosity, CPS @ 80°F. (27°C):** 100-500

AVAILABLE PACK SIZES:

D-5082NS

- ▶ Case of 12 of 16 fl oz (473 mL) Aerosols-002054

ZC-082

- ▶ Case of 4 each Gallon (4 each of 3.8 Liter) Cans-009424
- ▶ 5 Gallon (18.9 Liter) Pail-002131
- ▶ 55 Gallon (208 Liter) Drum-002132
- ▶ Special Packaging Upon Request

ZC-082



Page 4 of 5

Product description:

SELF HEALING CORROSION CONTROL LUBRICANT

AVAILABLE PACK SIZES (CONTINUED FROM PAGE 3):

Sur-Prep® 3160

- ▶ Case of 12 of 16 fl oz (473 mL) Aerosols-010938
- ▶ Case of 4 each Gallon (4 each of 3.8 Liter) Cans-008578
- ▶ 5 Gallon (18.9 Liter) Pail-008579
- ▶ 55 Gallon (208 Liter) Drum-008580
- ▶ Case of 6 Canisters of Towelettes-100026
- ▶ Case of 100 Individual Towelettes-011844
- ▶ Special Packaging Upon Request

D-5640NS

- ▶ Case of 12 of 16 fl oz (473 mL) Aerosols-002070



For more information contact us :
zipchem@addevmaterials.com



Part of



ADDEV
MATERIALS

ZC-082



Page 5 of 5

Product description:

SELF HEALING CORROSION CONTROL LUBRICANT

AVAILABLE PACK SIZES (CONTINUED FROM PAGE 4):

ZC-640

- ▶ Case of 4 each Gallon (4 each of 3.8 Liter) Cans-009430
- ▶ 5 Gallons (18.9 Liter)-002155
- ▶ 55 Gallons (208 Liter)-008181
- ▶ Special Packaging Upon Request

Sur-Prep® 3167

- ▶ Case of 12 of 16 fl oz (473 mL) Aerosols-103765
- ▶ Case of 4 each Gallon (4 each of 3.8 Liter) Cans-103762
- ▶ 5 Gallon (18.9 Liter) Pail-103763
- ▶ 55 Gallon (208 Liter) Drum-103764
- ▶ Special Packaging Upon Request



For more information contact us :
zipchem@addevmaterials.com



Part of



ADDEV
MATERIALS