

COR-BAN® 23



Page 1 of 4

Product description:

CORROSION INHIBITING COMPOUND

FEATURES:

- ▶ A long lasting, water displacing, and high penetration corrosion inhibiting compound
- ▶ Offers fast dry time and thin film of BMS 3-23
- ▶ Offers long lasting corrosion inhibition properties of BMS 3-29 and BMS 3-35
- ▶ Use in place of Airbus CML 15-006



KEY BENEFITS:

- ▶ Fast dry time
- ▶ Free of chromates
- ▶ Free from heavy metals
- ▶ Low toxicity
- ▶ Non-sagging, detectable, and water displacing film
- ▶ Very low dry film weight
- ▶ Solvent removable
- ▶ Non-cracking and non-flaking to -65°F (-54°C)
- ▶ Non-tacky
- ▶ > 3000 Hours Salt Spray
- ▶ < 0.3 Mil (8 microns) Required To Surpass Specification

Rev: 20082W
02-06-2026



For more information contact us :
zipchem@addevmaterials.com

COR-BAN® 23



Page 2 of 4

Product description:

CORROSION INHIBITING COMPOUND

SPECS:

<ul style="list-style-type: none">• Airbus AIMS 09-08-001 Type I Grade 3• Boeing BMS 3-23K Type II Class 2 Grade A & B (QPL)• Boeing BMS 3-35• de Havilland DHMS C4.12 Type II Grade 3 & 4 (QPL)• Bombardier BAMS 565-006 Ty V	<ul style="list-style-type: none">• Embraer MEP 10-063 (QPL)• Fed-Ex E.O. 9-5100-7-5001• NSN: 8030-01-531-7361 (16 fl oz (473 mL) Aerosol)
--	--

APPLICATIONS:

- ✓ Use on upper edge floor beams, wheel wells, pressure deck, and center wing sections
- ✓ Apply by conventional airless, air-operated spray equipment, or aerosol
- ✓ The Cor-Ban® 23 aerosol can be used in conjunction with the Formit® extensions to provide targeted spray to areas that may be difficult to reach but need to be coated. Please refer to the Formit® technical data sheet for more information.
- ✓ All properties represented were achieved with a dry film thickness of range 0.3 - 0.5 mils (7-12 microns)
- ✓ The wet film will self level to achieve the desired dry film thickness when applied to an inclined surface
- ✓ One aerosol can covers approximately 160 ft² (14.9 m²) and one gallon (3.8 Liters) of bulk material covers approximately 2290 ft² (56.2 m²/liter)
- ✓ Store Cor-Ban® 23 at 40°F to 100°F (4.4°C - 37.8°C) in the original unopened containers. Keep containers closed when not in use and protect Cor-Ban® 23 from direct sunlight.



For more information contact us :
zipchem@addevmaterials.com

COR-BAN® 23



Page 3 of 4

Product description:

CORROSION INHIBITING COMPOUND

PHYSICAL PROPERTIES:

- ▶ **Color:** Transparent Reddish-Pink
- ▶ **Tack Free Time:** <1 hour
- ▶ **Dry Through Time:** 72 hours
- ▶ **Exfoliation:** Pass At -65°F (-54°C)
- ▶ **Flash Point:** 114°F (46°C)
- ▶ **Low Temp Flaking:** Pass
- ▶ **Non-Volatiles:** 42%
- ▶ **Operating Temperature:** -65°F (-54°C) to 350°F (177°C)
- ▶ **Salt Spray Protection:** > 3000 hours on aluminum
- ▶ **Shelf Life:** 3 Years From Date Of Shipment If Properly Stored
- ▶ **Penetration:** >4 inches (10.1 cm) per hours per BMS 3-35
- ▶ **Fungal Growth per Fed-STD-810 Method 508.7:** 0 (No Microbial Growth)
- ▶ **Specific Gravity:** 0.88
- ▶ **Viscosity:** 35-40 cps.
- ▶ **Water Displacement:** 0% Rust



For more information contact us :
zipchem@addevmaterials.com

COR-BAN® 23



Page 4 of 4

Product description:

CORROSION INHIBITING COMPOUND


AVAILABLE PACK SIZES:

Cor-Ban® 23

- ▶ Case of 12 of 16 fl oz (473 mL) Aerosols-008017
- ▶ Case of 12 each Quarts (946 mL)-010097
- ▶ Case of 4 each Gallon (4 each of 3.8 Liter) Cans-009401
- ▶ 5 Gallon (18.9 Liter) Pail-008015
- ▶ 55 Gallon (208 Liter) Drum-008016
- ▶ Special Packaging Upon Request

Formit®

- ▶ 12 Assemblies Per Package
- ▶ **Formit® Sample Pack** with 3 each of
Formit®-18-F,
Formit®-18-180,
Formit®-18-360,
and **Formit®-18 STD-Fog-100107**

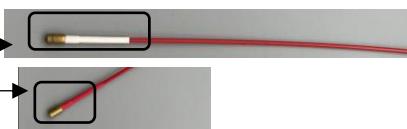

For more information contact us :
zipchem@addevmaterials.com

